

The LED flood lighting can focus and spot the lighting to a far distance and light big area, not just indoor but also outdoor, built-in driver, compact size, easy to install, widely used in warehouse factory & commercial & Industrial area




**TECHNICAL CHARACTERISTICS**

Input Voltage	: 220V-250V/50Hz
Rating Power	: 50W
Electronic Driver	: Integrated High Performance Isolated Driver
Power Factor (PF)	: >0.9
Body Color	: Black
Beam Angle	: 120°
Color Temperature	: 3000K /4000K /6500K



Working Temperature	: +60°C
PROTECTION	High voltage cut-off to protect circuitry Short & Over loading protect circuitry IP66 for waterproof
CONSTRUCTION	Aluminum body Tempered Glass Metal hanger
DIMENSION	186.80mm(W)X199.50mm(H)
PACKING	One unit Per carton
APPLICATION	: Indoor / Outdoor
COMPLIANCE	: SAA
WARRANTY	: 3 YEARS

DIMENSION (mm)

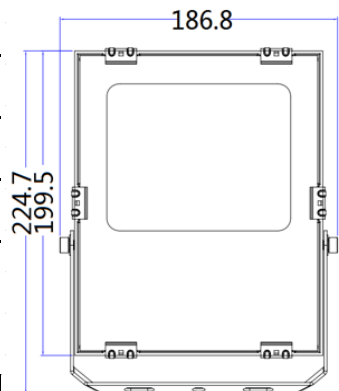

**ORDERING INFORMATION**

MODEL	LIFE SPAN	WEIGHT GROSS
ST-TG5092B	50,000 HOURS	1.10Kg